


Data sheet GRP – Grating Type HKP 30.38 I-Za-Sw1

product:	GRP - Grating
type:	HKP 30.38 I-Za-Sw1
material:	fiberglass E-Glas, unsaturated polyester-resin, high grade isophthalic resin
colour:	grey, near RAL 7035 (other colours on demand possible)
height:	30 mm
surface:	topside closed and gritted
width of bars:	6-7 mm
pitch:	38,1 x 38,1 mm
meshwidth:	31 x 31 mm

Tolerance:	
length:	+0/-4 mm
width:	+0/-4 mm
height:	+1/-1 mm
weight:	+10/-10 %
resin content:	appr. 68 %
glass fiber content:	appr. 32 %

distributed load:	5,0 kN
pointload:	1,5 kN
load area:	200 x 200 mm
free span:	670 mm
deflection:	4 mm

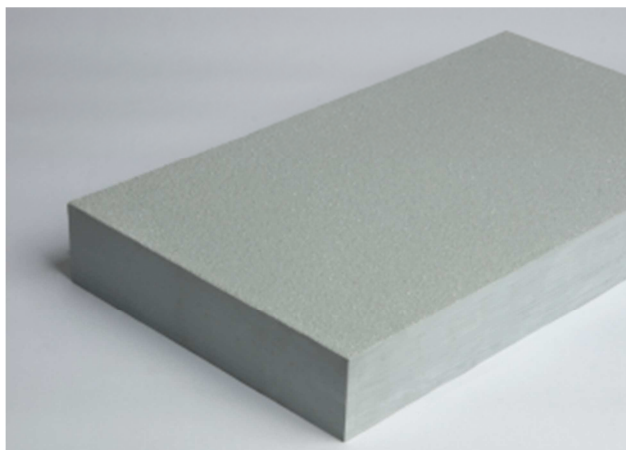

The GRP gratings are according to the rules of the Accident Prevention & Insurance Association Germany and the DIN 24537-3 gratings as floor covering Part 3: GRP gratings, walkable up to distance between supports of 670 mm. Necessary supports are set by the customer!.

properties:	UV- resistant
fire-class:	Bfl-s1
bleeder-resistance:	$1.098 \times 10^{17} \text{m/Ohm} \times \text{mm}^2$
anti-slip serration class:	R13 V10 acc. to BGIA
weight:	appr. 18 kg/m^2

panel sizes:	1226 x 3664
--------------	-------------

WARNING: ONE SIDE CLOSED SURFACE:

GRATINGS WITH ONE SIDE CLOSED SURFACE CAN ALSO BE DETERMINED BY THE PRODUCTION PROCESS IF THEY ARE NOT CONNECTED TO THE SUBSTRUCTURE, THROW (BOWL ON THE LAMINATE SIDE).